



TOP MOUNT REFRIGERATOR



PRODUCT MODEL NUMBERS

WRTX4418TB
WRTX4418TW
WRTX4418TZ
WRTX5418TB
WRTX5418TW
WRTX5418TZ

Electrical: A 115V, 60Hz, AC only, 15 or 20 amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting.

PRODUCT DIMENSIONS

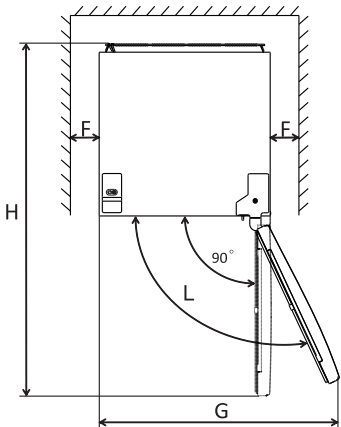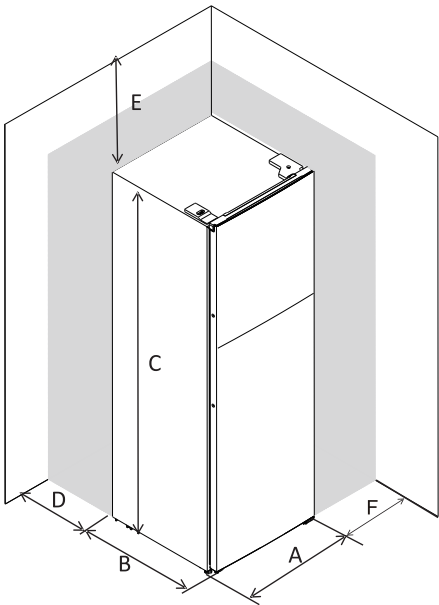

A	B	C	D	E	F	G	H	L
749 mm	740 mm	1691 mm	minimum =50 mm	minimum =30 mm	minimum =30 mm	1275 mm	1229 mm	135 °

LOCATION REQUIREMENTS

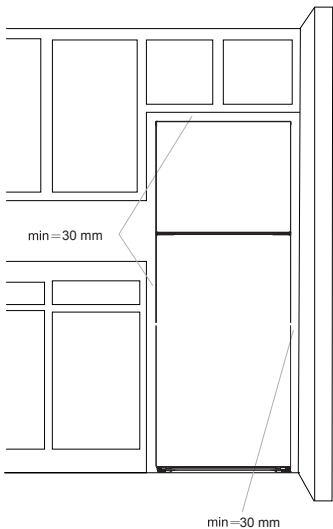

To ensure proper ventilation for your refrigerator, allow for 1.18”(30 mm) of space on each side and at the top. Allow for 2”(50 mm) of space behind the refrigerator.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 61°F (16°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 61°F (16°C) and 100°F(38°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.